

Date: **1/2/17** 

Engineering Bulletin: **121601** 

Effective Date: Immediately

Released By: John Kolbeck


**Subject: 900RW Enhancements** 

The 900RW Enhancement project is now complete. We have added splice sleeves for the head / sill frames to allow for continuous runs of SSG mullions. When the SSG mullions are used, the head / sill frames must run through. A maximum of 15' between splices is recommended. We have also added new shear blocked horizontal members that will work with the SSG mullions. These are available in both captured and SSG horizontals for the  $4 \frac{1}{2}$ " and 6" system depths. The captured horizontal is exterior glazed only and the exterior glass stop can span multiple lites up to a maximum of 15'.

The Price Book, details, installation instructions, and Glazier Studio have all been updated with the new parts and details.

Below are details showing the head / sill frames with the splice sleeves installed and the new horizontals.

Note: All SSG units require exterior access for glazing. Please refer to the installation instructions.

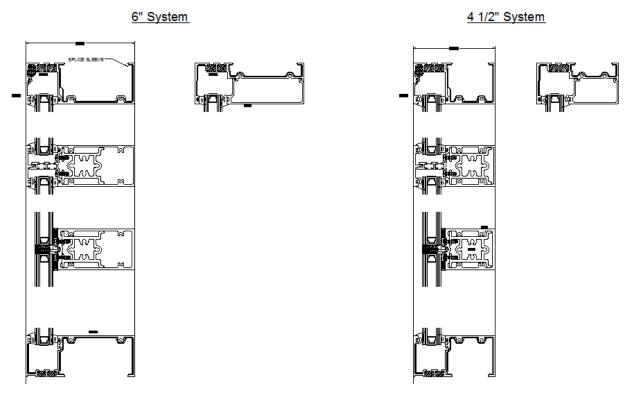

3056 Walker Ridge Dr., NW, Suite G

Walker, MI 49544

800.866.2227

fax 877.299.2414

www.tubeliteinc.com