


400CW/T BACK MEMBER PROFILES - 2-1/2" mullion (unless noted)




STANDARD TONGUE RECEIVER

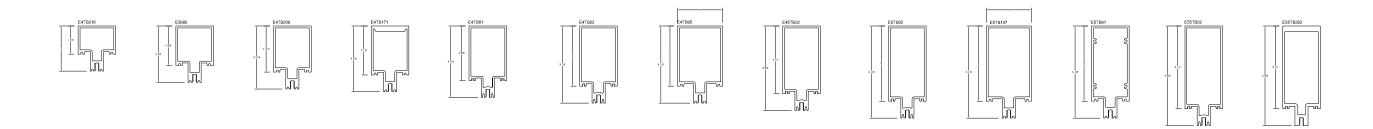

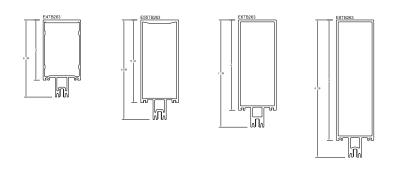




-shallow tongue $^{\perp}$



SSG BACK MEMBER



SPLAYED MULLION



LEADERS IN ECO-EFFICIENT STOREFRONT, CURTAINWALL AND ENTRANCE SYSTEMS

Last Revised: 04-09-2019