




780 SERIES FULL SURFACE - 780-157 | 780-157HD - STANDARD DUTY OR HEAVY DUTY

SPECIFICATIONS

Material:	Aluminum 6063-T6
Clearance:	1/32" (1 mm) minimum recommended for hinge side plus standard lockside clearance
Fasteners:	Dril-Kwik® screws and sex bolts
Length Options:	Standard and custom lengths available
Door Reinforcement:	None required
Frame Reinforcement:	None required to 200 lbs., heavier weight use 16-gauge channel
Optional Fire Rating:	Up to 3-hour metal and 90 minute wood composite (with studs)
Notes:	See additional fire rating details on page 3

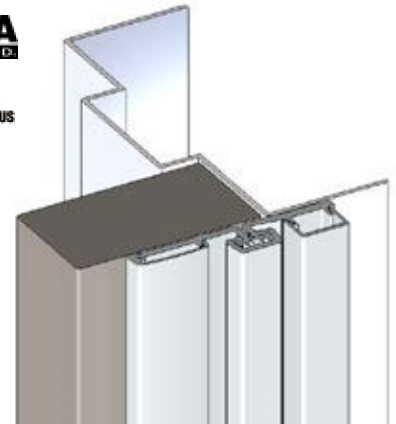

(Left hand shown)

FEATURES

- Standard duty for medium frequency doors.
Heavy duty for high frequency doors or heavy, medium frequency doors.
- For surface applications where frame face dimension is limited
- Security moldings
- 1/16" (1.5 mm) inset

Length		Fastener Count			
Inches	Millimeters	# Sex Bolts		# Pan Head	
		SD	HD	SD	HD
79	2007	8	8	34	34
83	2108	8	8	38	38
85	2159	8	8	38	38
95	2413	10	10	38	38
119	3023	12	12	46	46

