


E24650

Storefront Framing

E24650 Series Storefront Framing has the same design, assembly and accessories as the 14000 center glazed system's 2" face, but with a 6-1/2" depth. This additional 2" depth on the interior side of the frame provides greater structural properties and allows taller first floor openings. The wider profile also cuts a distinctive image for a storefront that stands out from the crowd.

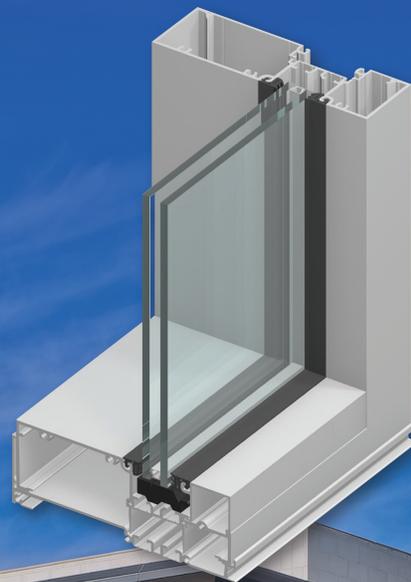

TCC 35 Eagle, Buildings A, H, J
Photographer: Joe Hernandez

400 Series
Curtainwall

ALSO
USED
WITH

Standard Wide
Stile Entrance


TUBELITE[®]

DEPENDABLE

LEADERS IN ECO-EFFICIENT STOREFRONT,
CURTAINWALL AND ENTRANCE SYSTEMS

E24650

Storefront Framing

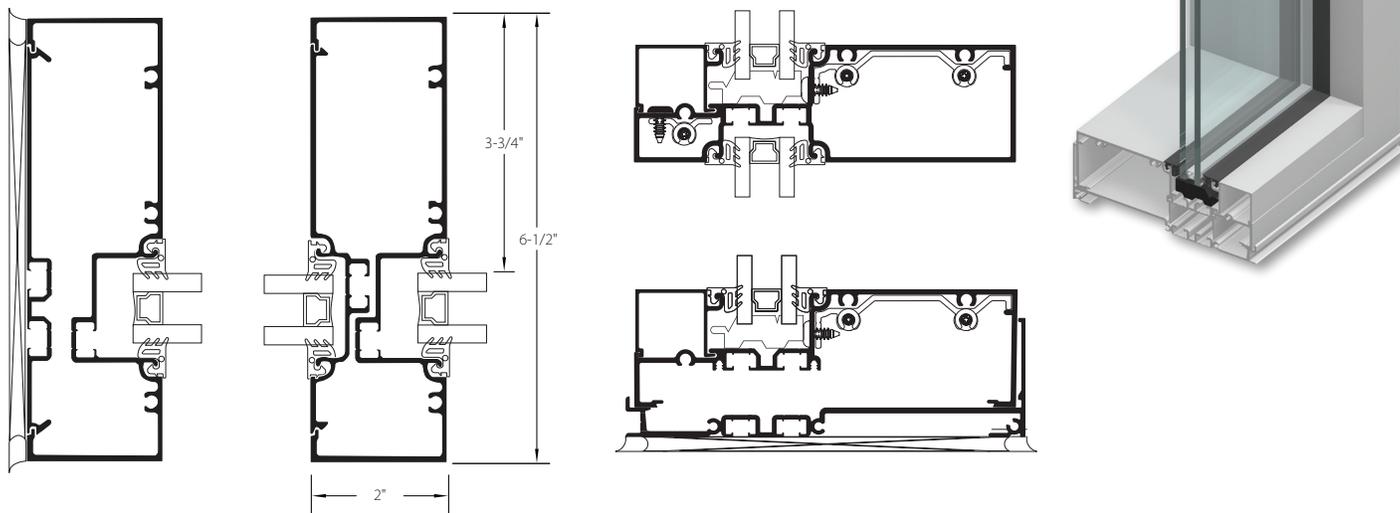

System Features:

- 2" x 6-1/2"
- Non-thermal
- Glass plane: Outside
- 1" standard infill (1/4" to 1-1/8")

Optional Features:

- Screw-spline or shear block connections
- Steel reinforcing if required
- A wide variety of standard anodized and painted colors are available to complement any project with warranted protection, as well as street appeal.
- Integrates with: all Entrances, 3700 Insert Vents, and Sun Control

Performance Test Standards

Air Performance	ASTM E 283
Water Performance	AAMA 501 and ASTM E 331
Structural	ASTM E 330
Thermal	AAMA 1503
Thermal Break	AAMA 505 and AAMA TIR-A8
Acoustical	AAMA 1801 and ASTM E 1425

E24650 Series Product Specifications

Application: Medium-Rise storefront, front set glass, outside glazed

Description: 2" x 6-1/2" nonthermal, outside or inside flush glazed storefront, front set glass.

Face Width:	Overall Depths:	Glass Thickness:	Air Infiltration:	Water Infiltration:	Structural:	CRF:	U-Factor**:	Acoustic
2"	6-1/2"	1"	0.06 CFM/Ft.2 @ 6.24 PSF	12 PSF – Static 12 PSF – Dynamic	30 PSF – Design 45 PSF – Overload	P & D 63 _f / 69 _G Strut 72 _f / 72 _G	0.40 – P&D Filler 0.35 – Strut Filler	31 STC 25 OITC

** U-Factor per NFRC 100: COG = 0.24 with warm edge spacer, 1-3/4" x 4-1/2" non-thermal frame.

Refer to the U-Factor table at: www.tubeliteinc.com/products/storefront/e-t-series-storefront-framing/ for other glass makeups and configurations.

DISCLAIMER: Tubelite takes no responsibility for product selection or application, including, but not limited to, compliance with building codes, safety codes, laws, merchantability or fitness for a particular purpose; and further disclaims all liability for the use, in whole or in part, of this Technical Guide in preparation of project specifications and/or other documents. Technical Guides are subject to change at any time, without notice, and at Tubelite's sole discretion. ©2018 Tubelite Inc.

070120

TUBELITE®

DEPENDABLE

LEADERS IN ECO-EFFICIENT STOREFRONT,
CURTAINWALL AND ENTRANCE SYSTEMS