

## Standard Narrow Stile Entrances

Our Standard Narrow Stile Entrances are designed for light-to-moderate use in commercial applications. Standard Narrow Stile has 2-1/8" vertical stiles and top rail, and 4" bottom rail – optional up to 10" for ADA compliance. The smooth design of Tubelite's door hardware features a convenient pull handle and push bar with lock location 36" above the finished floor. Stock doors and frames are anodized with clear or dark bronze finishes, and readily available for quick delivery.

### Durable Tie-Rod Construction

The strength and flexibility of steel tie-rod construction is what holds it all together and makes our doors endure. Tie-rod assembly is as durable as welded corner construction, but superior in many ways. Tubelite doors can be modified, disassembled or resized right in the field. No other door offers you this much strength and flexibility.



**400 Series  
Curtainwall**


**ALSO  
USED  
WITH**

**14000 Series  
Storefront**

**TUBELITE®**  
**DEPENDABLE**

LEADERS IN ECO-EFFICIENT STOREFRONT,  
CURTAINWALL AND ENTRANCE SYSTEMS

## Standard Narrow Stile Entrances

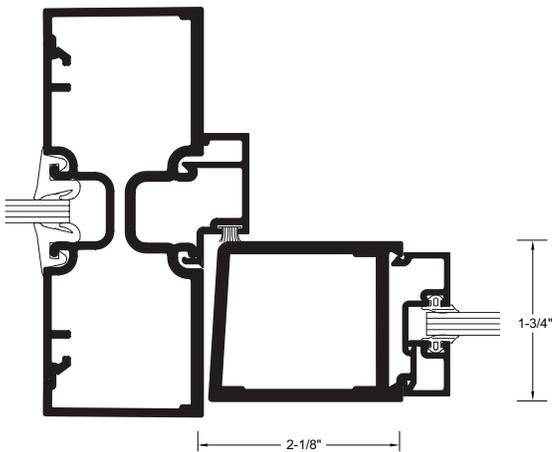

### System Features:

- Standard 2-1/8" (53.975Mm) sight line on verticals and top rail
- Deadbolt lock
- 1" dia. push bar and offset pull handle
- Standard infill options 1" (25.4mm), and 1/4" (6.35mm), other infills available
- 3'0" and 3'6" width single doors, 6"0" width pairs of doors
- 7'0" height door leaves

### Optional Features:

- 4" (101.6mm) and 10" (254mm) bottom rails
- Mortised butt hinges, offset pivots, continuous hinges, center pivots
- Latch locks, cvr & rim panics, electric strikes
- Hardware by others
- 1-3/4" or 2" x 4-1/2" sight line frame member
- Intermediate horizontal or vertical mid-rails
- 7 anodized and 19 painted standard finishes
- Custom height and width doors

Note: Dimensions do not include 1/2" glass stops.

Standard Entrance Series	Narrow Stile
<b>Traffic</b>	Light to Moderate
<b>Vertical Stile 1-3/4" x</b>	2-1/8"
<b>Top Rail 1-3/4" x</b>	2-1/8"
<b>Bottom Rail 1-3/4" x</b>	4" (opt. up to 10")

### Standard Narrow Series Product Specifications

**Application:** Offices, Shopping Plazas

**Description:** 2-1/8" vertical stiles and top rail, and 4" bottom rail – optional up to 10" for ADA compliance

Glass:	Air Infiltration:	Structural:	U-Factor** Single Door:	U-Factor** Double Door:
1" std (1/8" – 1")	1.0 CFM / Ft.2 @ 1.57 PSF	30 PSF – Design 45 PSF – Overload	Narrow: 0.64	Narrow: 0.59

\*\* U-Factor per NFRC 100. Refer to the U-Value table at: [www.tubeliteinc.com/products/entrances/standard-narrow/](http://www.tubeliteinc.com/products/entrances/standard-narrow/)

DISCLAIMER: Tubelite takes no responsibility for product selection or application, including, but not limited to, compliance with building codes, safety codes, laws, merchantability or fitness for a particular purpose; and further disclaims all liability for the use, in whole or in part, of this Technical Guide in preparation of project specifications and/or other documents. Technical Guides are subject to change at any time, without notice, and at Tubelite's sole discretion. ©2017 Tubelite Inc.

030120

**TUBELITE**<sup>®</sup>  
**DEPENDABLE**

LEADERS IN ECO-EFFICIENT STOREFRONT,  
CURTAINWALL AND ENTRANCE SYSTEMS